

# DECLARATION OF PERFORMANCE

## K41/1/RD/24

### 1. Unique identification code for the construction product:

VA10

Trade name: SERENITY

Supplementary identification information specified on the product packaging

### 2. Specification of a construction product, type, application and harmonized standard:

Resilient floor coverings intended for the application inside buildings subject by a harmonized standard EN14041:2004/AC:2006 – Resilient, textile and laminate floor coverings - essential characteristics.

### 3. Manufacturer of the construction product:



Unilin Flooring Polska Sp. z o.o.  
ul. Powstańców Śląskich 54, 42-700 Lubliniec  
phone: +48 (34) 341 23 60

### 4. System of assessment and verification of constancy of performance construction product:

System 3 – declaration of the performance of the essential characteristics of the construction product by the manufacturer on the basis of the following items:

- a) the manufacturer shall carry out factory production control,
- b) the notified laboratory shall assess the performance on the basis of tests (based on samples taken by the manufacturer), calculations, tabulated values or descriptive documentation of the construction product

### 5. Notified bodies involved in the assessment and verification of the constancy of performance according with system 3:

- a) BUILDING RESEARCH INSTITUTE, notified body no. 1488  
ul. Filtrowa 1, 00-611 Warszawa, Poland

Carried out the designation of the product within:









- reaction to fire classification

- b) EUROFINS PRODUCT TESTING A/S, notified body no. 2657  
ul. Smedeskovvej 38, DK-8464 Galten, Denmark

Carried out the designation of the product within:

- emission of volatile organic compounds (VOC)
- emission of formaldehyde

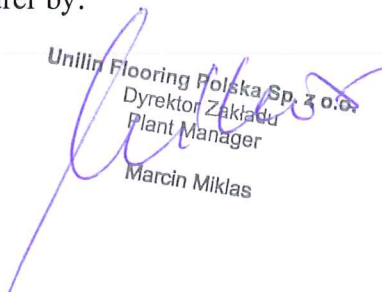
**6. Declared performance:**

<b>ESSENTIAL CHARACTERISTICS</b> <b>in accordance with EN 14041:2004/AC:2006</b>		 <b>24</b>
Reaction to fire	C <sub>FL</sub> -s1	
Content of PCP	NPD	
Emission of formaldehyde	E1	
Water tightness	NPD	
Slip resistance	$\mu \geq 0,30$	
Electrical behavior	$\leq  2,0 $ kV antistatic	
Electrical resistance	$\leq 1,0 \times 10^9 \Omega$ static dissipative	
Thermal resistance R <sub>23</sub>	0,047 m <sup>2</sup> K/W	

**7. The performance of the product identified in point 1 are in conformity with the declared performance in point 6.**

*This declaration of performance is issued in accordance with the Regulation (UE) no. 305/2011 under the sole responsibility of the manufacturer identified in point 3.*

Signed for and on behalf of the manufacturer by:

  
 Unilin Flooring Polska Sp. z o.o.  
 Dyrektor Zakładu  
 Plant Manager  
 Marcin Miklas

Lubliniec, 02.01.2024